

HI-200/400

HOME BOOSTER PUMPS

- Liquid temperature : 0~40°C / 32~104°F
- HP range : 1/4~1/2HP / 200~400W
- PH : 6~8
- Rated Speed : 2900 / 3450 rpm
- Protection calss : IP55
- Maximum suction : 8M

Features

1. Silence & ECO friendly
2. Aqua intelligent program (AIP)
3. Easy installation
4. Easy to clean

Applications

1. Rooftop water booster
2. Water pipe booster control
3. Gardening water system
4. Water booster control
5. Water pipe recirculation system
6. Filtration system





Specification

Model No.	Output HP	Outlet W	Outlet mm	Outlet inch	Max Flow (LPM)	LPM Flow @ Head	Max Head (M)	Recommended Floor	Weight Kg
HI-200(60Hz)	1/4	200	20	3/4"	60	55 48 38 25	-	Up to 3rd floor	10
HI-200(50Hz)	1/4	200	20	3/4"	55	50 42 33 20	-	Up to 3rd floor	10
HI-400(60Hz)	1/2	400	25	1"	70	68 65 60 50 35	28	Up to 4th floor	12
HI-400(50Hz)	1/2	400	25	1"	70	67 62 55 45 30	28	Up to 4th floor	12


Dimension

Model	Dimension																	
	L	L1	L2	L3	L4	L5	W	W1	W2	W3	W4	W5	H	H1	H2	H3	H4	H5
HI-200	175	84	86	206	207	157	166	130	80	50	194	189	280	230	150	120	376	86
HI-400	175	84	86	226	207	157	166	130	80	50	194	189	280	230	150	120	376	86


Curve

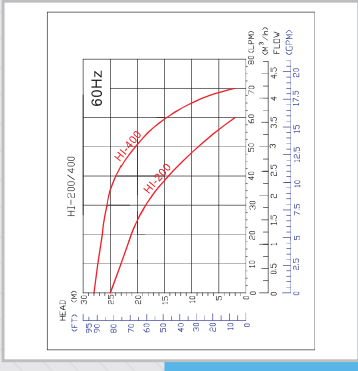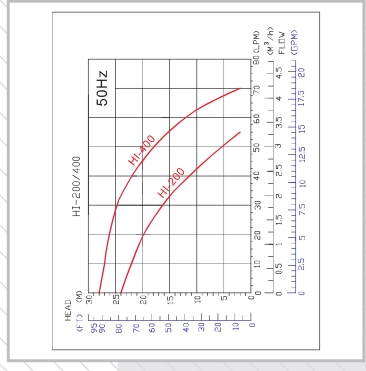

Ground Installation

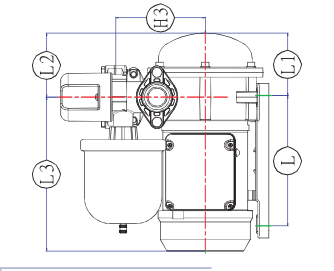

Wall Mount Installation

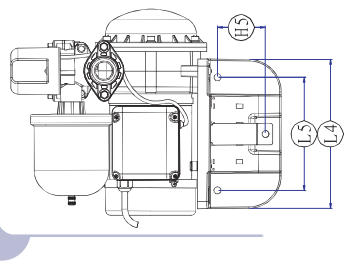

Standard Accessories

Model	Accessories
HI-200(60Hz)	Flange, Packing for strainer, Packing
HI-200(50Hz)	Flange, Packing for strainer, Packing
HI-400(60Hz)	Flange, Packing for strainer, Packing
HI-400(50Hz)	Flange, Packing for strainer, Packing

